



Jofemar
VENDING

Vision^{ES Plus} FUTURE *touch*





VANDAL-PROOF
LOCK



OPTIMISED
CAPACITY AND
VOLUME



MDB CARD
PAYMENT SYSTEMS
COMPATIBLE



EASYFLEX
DELIVERY
SYSTEM



PRODUCT
DELIVERY
DETECTION
PHOTOCELLS



IMPROVED
DESIGN




PREMIUM
PRODUCTS



ELEVATOR
DELIVERY SYSTEM



DIGITAL SIGNAGE

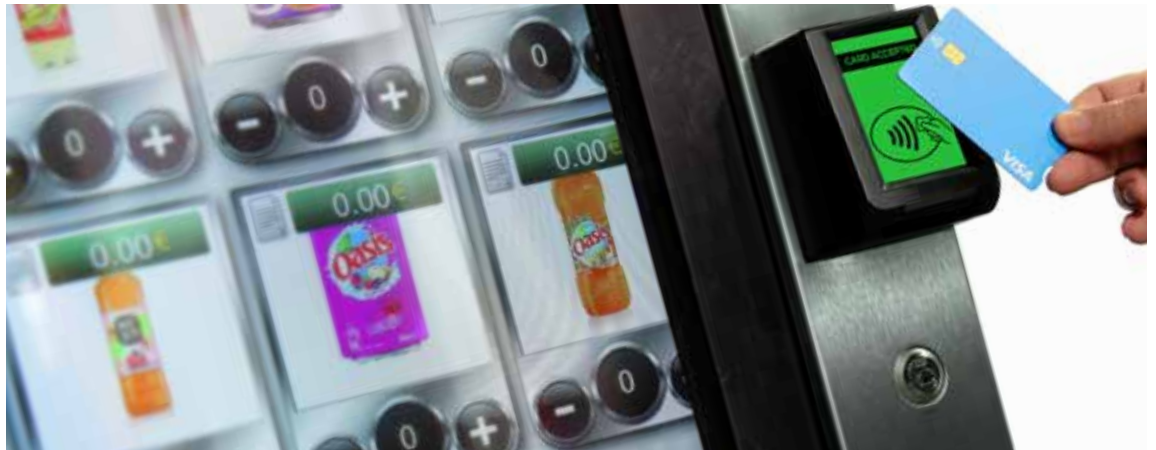

Vision^{ES Plus} FUTURE touch

The new vending shop experience

The Future Touch, within Jofemar's Vision range of vending machines, is the innovative solution to maximize the profitability of any vending or retail location, including all the advantages of the Jofemar product extraction systems EASYFLEX, adaptable to any product packaging, an extra-large delivery elevator, and a 42" touch-screen vend interface.

A new shopping experience for the customers on a large interactive touch panel, allowing to display more information about the product, as well as advertising functions with videos and images during standby mode.

VENDING FEATURES

- Flexible setup and programming. Its channel adjustment system allows incorporating new products at any time without using tools.
- FIFO (First In First Out) System. Continuous renewal with the freshest product. Product dispensing according to loading order.
- Adjustable motor torque for each selection.
- Continuous performance self-testing.
- Health timer to prevent selling of out-of-date product. Programmable expiration date by selection or channel.
- Dinaminc lighting for the product collection door.

CONSTRUCCIÓN

- Modular cabinet structure, treated against rust and corrosion.
- Gusset closing and three anchor points, with security lock and vandal-proof strip.
- Cabinet injected with insulating foam to guarantee efficient cooling and lower energy consumption.
- Screen system isolated to the main products cabinet.
- Bluetec line, finished in black metallic coating ,

stainless steel frames and silver motives.

CREDIT MANAGEMENT

- Credit card reader or user card reader ready, MDB protocol with standard EVA hole for its assembling.





ESPLUS TOUCH REFRIGER V7	
Temperature	With/Without cooling unit
Maximum capacity	8 trays of up to 10 channels
Elevator	Yes
Size (mm)	1.830 x 803 x 1072
Weight	340 kg
Energy supply	230 V, 50 Hz*
Cooling unit	Opcional
Energy classification (EU) 2019/2018	

*Check for other voltages

VENDING INTERFACE	
Screen size	42"
Touch technology	PCAP



J-SmartVending vend interface option:

- PC based, with integrated programming system, images, and product features.
- Remote support.
- Fully customizable, allows complete adaptation of the user vend interface to a brand image and colours.
- Compatible with Jsuite-VendingSmart telemetry platform:
 - Accountings
 - Stock control
 - Remote prices programming
 - Remote update of product images



Taos Touch vend interface option:

- Management of images and product data by USB stick.
- Programming of prices and sales options in integrated programming system.
- Compatible with Jsuite-VendingLite telemetry:
 - Accountings
 - Stock control



TOUCHSCREEN



INTERACTIVITY/
UP-SELLING



REMOTE CLOUD
CONNECTION



ADAPTABLE AND
CUSTOMISABLE
SOFTWARE



CAN BE CONFIGURED
DEPENDING ON
NEEDS



Jofemar
VENDING

Technological
Innovation

Reliability

100% Jofemar
Technology

Jofemar

Ctra. Marcilla km 2
31350 PERALTA, Navarra SPAIN
Tel. +34 948 75 12 12
Fax +34 948 75 04 20
www.jofemar.com



VE-CT086EN12 R00
05/21

